

Lutron® | **NEW** Radio Powr Savr™ wireless occupancy and vacancy sensor

A simple way to go green

An innovative, wireless sensor designed for easy installation and optimum savings.

Installs in minutes

- sensor requires **no wiring**
- front accessible buttons make setup easy
- lens illuminates during test mode to verify ideal locations

Saves energy

- sensor turns lights off when room is unoccupied
- dimming adds additional energy savings

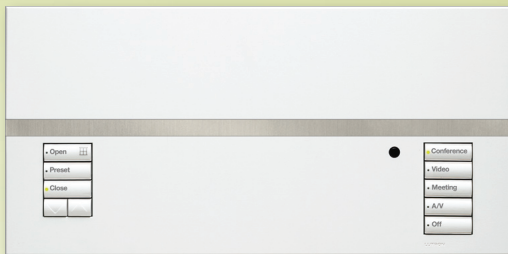
Superior capability

- 10-year battery life design
- exclusive XCT™ Technology for detecting fine motions
- can communicate with up to 10 dimmers and switches
- add up to three sensors for maximum coverage



ceiling-mounted wireless RF occupancy sensor (actual size)

Wireless occupancy sensor works with:



GRAFIK Eye® QS light and shade control with wireless technology



Maestro Wireless® dimmers



Maestro Wireless switches

For more information visit www.lutron.com/occsensors



©2009 Lutron Electronics Co., Inc.



Wireless Occupancy and Vacancy Sensors

Model #	Control Type
LRF2-OCRB-P-WH	occupancy/vacancy sensor: auto-on/auto-off or manual on/auto-off settings
LRF2-VCRB-P-WH	vacancy sensor: manual on/auto-off setting only (<i>Meets California Title 24 requirements</i>)

Wireless Occupancy and Vacancy Sensors Detection Range








Ceiling Height	Max. Room Dimensions for Complete Floor Coverage	Square Ft
8 ft (2.4 m)	18 x 18 ft (5.5 x 5.5 m)	324 ft ² (30.2 m ²)
9 ft (2.7 m)	20 x 20 ft (6.1 x 6.1 m)	400 ft ² (37.2 m ²)
10 ft (3.0 m)	22 x 22 ft (6.7 x 6.7 m)	484 ft ² (44.9 m ²)
12 ft (3.7 m)	26 x 26 ft (7.9 x 7.9 m)	676 ft ² (62.4 m ²)

Maestro® Wireless Dimmers and Switches

Model #	Control Type	Maximum Capacity
MRF2-10D-120-XX	single-pole, multi-location dimmer	1000W/VA incandescent/halogen, magnetic low voltage
MRF2-8ANS-120-XX	single-pole, multi-location switch*	8A light or 3A fan, incandescent, halogen, MLV, ELV, non-dim fluorescent ballasts, and general purpose fans
MRF2-6ANS-277-XX	single-pole, multi-location switch*	6A light, MLV, ELV, non-dim fluorescent ballasts
MA-R-XX	multi-location companion dimmer	120V, provides multi-location dimming for additional locations
MA-AS-XX	multi-location companion switch	120V, provides multi-location switching for additional locations
MA-AS-277-XX	multi-location companion switch	277V, provides multi-location switching for additional locations

**requires neutral connection*

Maestro Wireless dimmer and switches are available in gloss finishes to match any decor

						
White (WH)	Ivory (IV)	Almond (AL)	Lt. Almond (LA)	Gray (GR)	Brown (BR)	Black (BL)

Lutron Electronics Co., Inc.
7200 Suter Road
Coopersburg, PA 18036-1299
World Headquarters 1.610.282.3800

Technical Support Center 1.800.523.9466
Customer Service 1.888.LUTRON1

© 4/2009 Lutron Electronics Co., Inc. | P/N 367-1598